


IT6412 specification

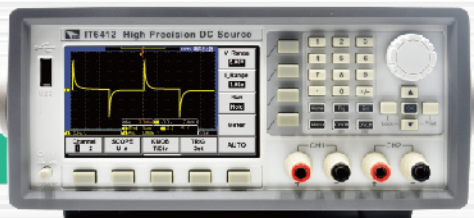


Parameters	CH1			CH2	
Output Rating (0°C - 40 °C)	Voltage	±15V	±9V	0-15V	0-9V
	Current	±3A	±5A	±3A	±5A
	Power	45W			
Load Regulation ±(% of Output+Offset)	Voltage	≤0.01%+2mV			
	Current	≤0.05%+1mA			
Line Regulation ±(% of Output+Offset)	Voltage	≤0.02%+2mV			
	Current	≤0.05%+1mA			
Setup Resolution	Voltage	1mV			
	Current	0.1mA			
	OVP	10 mV			
Readback Resolution	Voltage	1mV			
	Current	5ARange		1mA	
		5mARange		100nA	
Setup Accuracy (12-month validity, 25°C±5°C) ±(% of Output+Offset)	Voltage	≤0.02%+2mV			
	Current	≤0.05%+2mA			
	OVP	0.5V			
Readback Accuracy (12- month validity ,25°C±5°C) ±(% of Output+Offset)	Voltage	≤0.02%+2mV			
	Current	≤0.05%+2mA			
Ripple (20Hz -20MHz)	Voltage	≤ 3mVp-p/1 mVrms			
	Current	≤1mA _{rms}			
Setup Temperature drift coefficient (% of Output/°C+Offset)	Voltage	0.01%+0.2mV			
	Current	0.01%+0.2mA			
	OVP	0.1%+50 mV			
Readback Temperature drift coefficient (% of Output/°C+Offset)	Voltage	0.01%+0.2mV			
	Current	5ARange		0.015%+0.1mA	
		5mARange		0.01%+2uA	
Rising Time(no load)	Voltage	≤500uS			
Rising Time(full load)	Voltage	≤500uS			
Falling Time(no load)	Voltage	≤5mS			
Falling Time(full load)	Voltage	≤500uS			
Transient Time	50%-100% LOAD recover to 50 mV ≤50uS				
AC Input	Voltage1	110V±10%			
	Voltage2	220V±10%			
	Frequency	47HZ-63HZ			

Setup Stablity-30min (% of Output +Offset)	Voltage	0.01%+1mV
	Current	0.01%+1mA
Setup Stablity-8h (% of Output +Offset)	Voltage	0.01%+1.5mV
	Current	0.01%+1.5mA
Readback Stablity-30min (% of Output +Offset)	Voltage	0.01%+1mV
	Current	0.01%+1mA
Readback Stablity-8h (% of Output +Offset)	Voltage	0.01%+1.5mV
	Current	0.01%+1.5mA
Fuse Spec	Voltage1	5A
	Voltage2	2.5A
Sense Voltage	1V	
Programming Response Time(Typical)	5mS	
Power Factor	0.7 Max	
Max.Input Current	5A	
Max.Input Apparent Power	500VA	
Storage Temperature	-10°C~70°C	
Protection Function	OVP/OC/OTP	
Communication Interface	GPIB/USB/LAN	
withstand voltage (output to ground)	200Vdc	
Working Temperature	0~40°C	
Dimension (mm)	226mmW*88.2mmH*476.26mmD	
Weight (net weight)	9Kg	
Measuring Range	-20V~-+20V	
Readback Accuracy	0.02%+2mV	
Readback Resolution	1mV	
Readback Temperature drift coefficient (% of Input/°C+Offset)	0.02%+1mV	
Readback Stablity-30min (% of Output +Offset)	0.02%+1mV	
Readback Stablity-8 h (% of Output +Offset)	0.02%+1 mV	
Input common-mode voltage	<50Vdc	
Input Impedance	4.5MΩ	

ITECH

YOUR BEST POWER SOLUTION

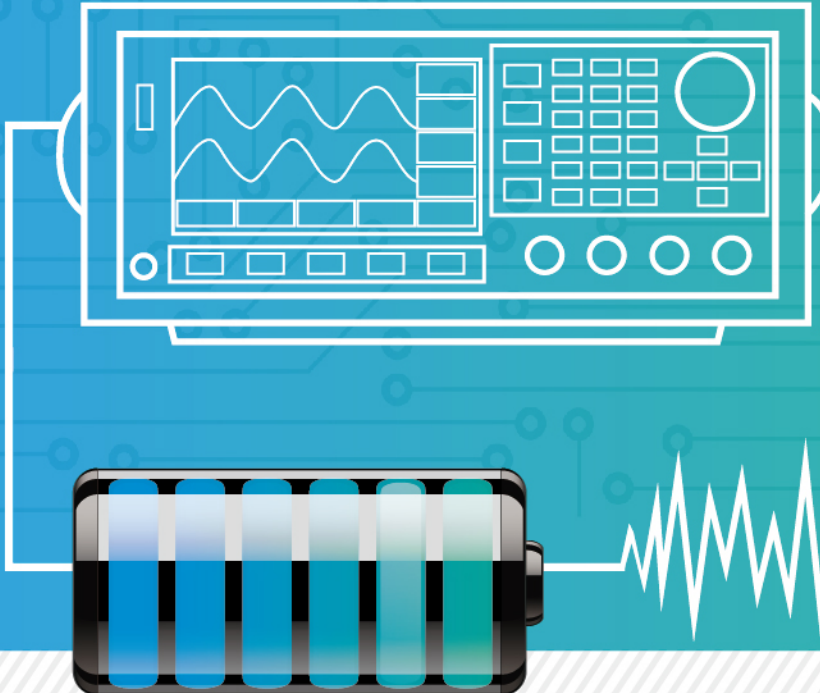


Battery Simulating function

Ultrafast transient time

Oscilloscope waveform display

Current readback resolution up to 100nA

IT6412
DUAL-CHANNEL BIPOLAR
DC SOURCE

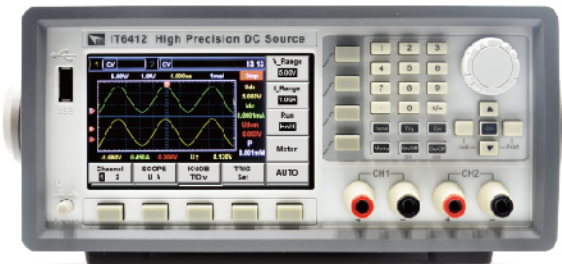

SINCE
1951

IT6412

DUAL-CHANNEL BIPOLAR DC SOURCE

IT6412 unique bipolar voltage/current output can be used as a bipolar power supply or a bipolar electronic load. The battery simulating function is especially applicable to portable battery power supplies test. Ultrafast transient time less than 50us and new designed speed shift mode achieves voltage/current high speed rising waveform without overshoot. Meanwhile, the user may have experience of Oscilloscope with our waveform display function, more easy and effective usage.

1 Features


- Dual Channel, Bipolar, Dual Range output
- Battery Simulating function (Battery test)
- Oscilloscope waveform display (DSO)
- Dual-channel display on high performance colorful LCD screen
- Ultrafast transient time < 50us
- Ultrafast Voltage rising time up to 500us (full load)
- Current readback resolution up to 100nA
- Built-in high accuracy DVM
- Variable output impedance
- Applicable to portable battery power supplies test
- LED test no overcharged current
- Relay out function achieves electrical isolation on terminals
- List function achieves voltage/current output as programmed
- Standard interface LAN/USB/GPIB

2 Dual-Channel/Bipolar/Dual-Range Output

As a dual-channel bipolar high speed liner DC source, IT6412 is available for easy-shifting dual range output with each channel. With max. $\pm 15V$ voltage and $\pm 5A$ current output, IT6412 can achieve testing for mobile and charger independently. IT6412 is multifunctional and with high performance, makes diversified testing requests available.

3 Oscilloscope Waveform Display Function

IT6412 provides waveform display function based on sample data. The voltage/current waveform is visible or invisible by your option, and can be adjusted by the knob. The graphic on the newly design colorful display can be saved, achieves easy and effective oscilloscope experience.

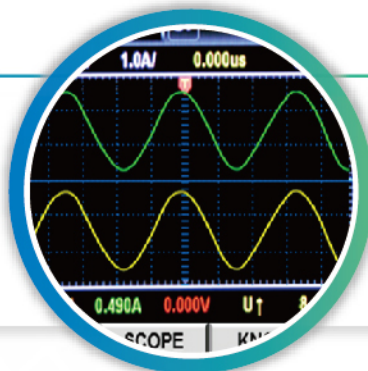


4 Battery Simulating Function

With the unique current bipolar design and 0~1 Ω variable output impedance, IT6412 is applicable to types of portable battery charge-discharge tests. Simulating the battery charge-discharge features and assist with other tests are also reliable. One equipment, diversified applications.




5 Ultrafast Transient Time, <50us

IT6412 is with ultrafast transient ability, the transient time for recovering to 50mV is less than 50us when 50%-100% loaded. New designed speed shift mode achieving voltage/current high speed rising waveform without overshoot, supports stable power supply, and ensures the security, especially for LED test.

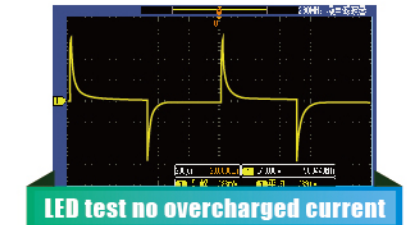


6 Screenshots Function

IT6412 provides screenshots function to facilitate customer data analysis. Press screenshots on front panel, the display graphic will be saved in inserted USB storage disk, easy for your reanalysis on data and waveform. The USB interface on front panel makes the data saving on time and easily.

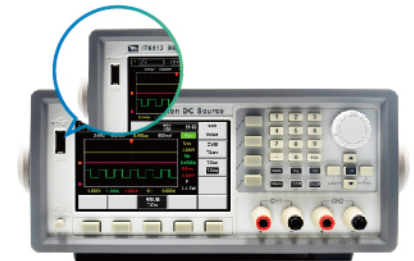

7 DVM Test Function

Abundant electrical basic measuring functions are available on IT6412. High accuracy DVM is built in each channel with readback resolution up to 1mV. The measured data will be visible on specified channel screen. The changes of voltage waveform measured by DVM can be observed by oscilloscope display function.

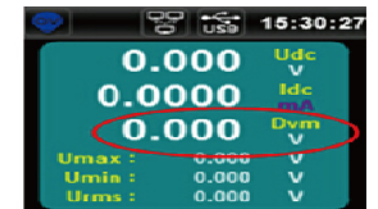

Application

- Portable battery-powered product test
- Small power solar cell test
- Battery protection board test
- Super bright LED test
- LED lamp beads test
- Power amplifier Test
- DC / DC converter test

